

**Tritech PA200 and PA500 Digital Precision Altimeters** are based on the same high performance electronics found in the well-proven, industry standard **SeaKing** sonar and profiler systems.

The range of compact **Tritech PA200 and PA500 Digital Precision Altimeters** provide exceptionally accurate height off seabed and subsea distance measurements.

Full digital synthesis of transmit and receive frequencies, together with greatly improved input dynamic range, offer unsurpassed levels of performance from a compact unit.

The units may be supplied with simultaneous analogue and digital outputs allowing them to be interfaced to a wide range of PC devices, data loggers, ROV telemetry systems and multiplexers.

OEM configurations including low magnetic signature, rigid polyurethane housings or right-angled heads are available on request.

Control of the altimeters may be performed in many ways including :

- Direct from a PC running DOS
- Direct from a PC running Windows
- Direct from a suitable control system
- Part of a SCU-3 RS485 network



### Features


- ⊖ *Analogue only outputs*
- ⊖ *Digital only output*
- ⊖ *Simultaneous analogue and digital outputs*
- ⊖ *Noise immunity*
- ⊖ *Can be field reconfigured for different applications*
- ⊖ *Free-running outputs*
- ⊖ *Interrogated outputs*
- ⊖ *Low operating voltage options*
- ⊖ *4000 metre standard depth rating*

### Applications

- ⊖ *ROV and AUV auto-altitude and under-ice measurement*
- ⊖ *Integration to CTD & oceanographic sensor packages*
- ⊖ *Low-cost hydrographic surveying of rivers and canals*
- ⊖ *Integration to bathymetric packages*
- ⊖ *Touchdown monitoring of subsea structures*
- ⊖ *Wave height measurement*
- ⊖ *Monitoring of scouring around bridge supports*

# Tritech PA200 and PA500

## Specification

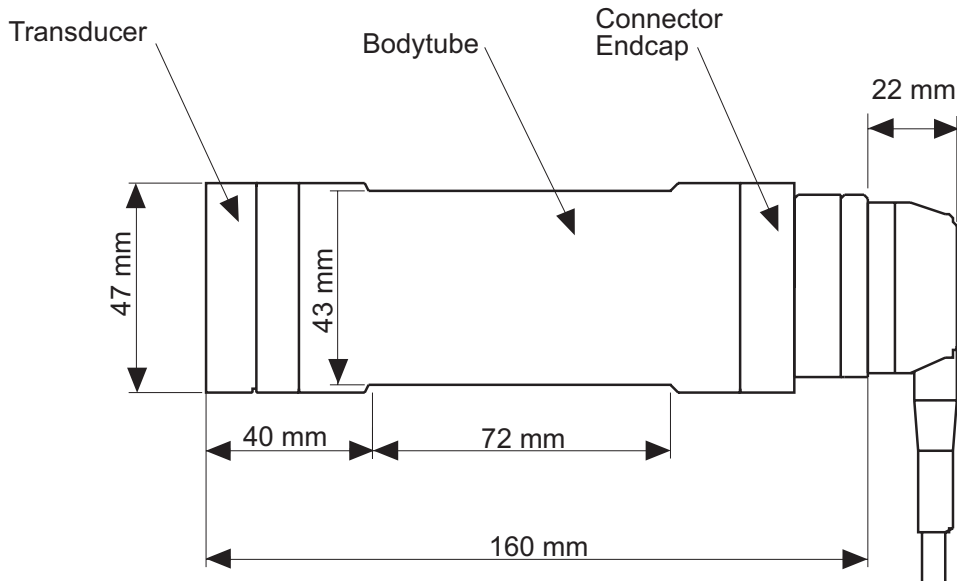

*all measurements in mm (inches)*

	<b>PA200-20</b>	<b>PA500-6</b>
<b>Operating frequency</b>	200 kHz	500 kHz
<b>Beamwidth</b>	20° Conical	6° Conical
<b>Operating range</b>	1 to 100 metres 0.5 to 50 metres	0.25 to 50 metres 0.1 to 10 metres
<b>Standard power supply</b>	24 VDC @ 80 mA, or 12 VDC @ 160 mA	
<b>Standard analogue output</b>	0 to 10 VDC (24 VDC units only), or 0 to 5 VDC	
<b>Digital resolution</b>	1mm on all ranges	
<b>Analogue resolution</b>	0.025% of range	
<b>Data communication options</b>	Serial RS232, or Serial RS485	
<b>Output modes</b>	Free running, or Interrogated, or Tritech SCU-3 network	
<b>Serial output format</b>	ASCII, 9600, 1, 8, n, 1	
<b>Length</b>	160mm	
<b>Diameter</b>	47mm	
<b>Standard depth rating (stainless steel body)</b>	4,000 m	
<b>Optional depth ratings and materials</b>	1,000m 2,000m and 6,800m	
<b>Optional acetal units depth rating</b>	1000 m	
<b>Weight in air</b>	1.1 kg	
<b>Weight in water</b>	0.8 kg	

*All specifications are subject to change in line with Tritech's policy of continual product development.*

*Ref: altimeter.pm65 Issue 9 Mch 00*



**Tritech International Limited**  
 Peregrine Road  
 Westhill Business Park  
 Aberdeen AB32 6JL  
 United Kingdom  
 Tel. : ++ 44 1224 744111  
 Fax : ++ 441224 741771  
 Email : sales@tritech.co.uk  
 http://www.tritech.co.uk

Marketed by:

